



## Aircraft Toilet Servicing Unit on Standard Commercial Chassis

Toilet servicing vehicles with bespoke tank capacities to suit specific customer requirements.

- Tank capacities can be supplied to suit customers requirements.
- Easily installed on standard commercial vehicle 7.5 – 12 tonne GVW chassis cab, dependent on selected options and tank size.
- Fully protected dedicated vacuum system with fail-safe non return valve and cut offs.
- High capacity 100mm (4 inch) flexible effluent hose fitted with quick release standard aircraft outlet connector.
- Rinse water delivery system including re-settable flow meter, pressure gauge, flexible delivery hose and standard 1 inch Roylyn aircraft connector.
- Non slip, self draining aluminium tread plate top tank decking providing safe and secure personnel access.
- A correctly balanced vehicle to prevent detrimental stresses and strains on chassis or tanks.
- Optional rear lifting platform for wide body operations.
- Hygiene quality, corrosion resistant, stainless steel tanks and fittings with longitudinal and transverse baffles mounted on high capacity shock absorbing flexible chassis mounts.
- Large 600mm access manholes for ease of cleaning and maintenance.
- Easily visible tank contents gauges.
- PTO/hydraulic powered, close coupled, high capacity pumps for efficient aircraft servicing.
- A hygienic vehicle which will reliably perform at all locations throughout the world irrespective of temperature or conditions.
- Finish painted to customers individual livery requirements with full wax treatment.
- Complies with Road Traffic Act, Motor Vehicle Construction and Use Regulations, IATA Airport Handling Equipment Specifications, Health and Safety and European CEN Standards.
- Optional rinse water disinfectant dosing system.
- Extreme temperature cold weather kit available as customer selected option incorporating insulated tanks and components with thermostatically controlled independently fired heaters.



Passenger Stairs  
Belt Loaders  
Cargo & Freight Vehicles  
**Toilet & Water Trucks**  
Aircraft Loaders  
Fuel Tank Repair Trolleys  
Heater Trolley  
Air Conditioning Trolley  
Maintenance Docks & Stagings  
Special Projects

Remember, each piece of equipment is maintained via our through-life support and training services – wherever you are in the world, 365 days of the year.

**T** +44 (0)1656 743700  
**E** office@amss.co  
**W** www.amss.co

“ Fast and effective aircraft lavatory servicing offering superior hygiene standards ”

### Chassis

- Can be fitted to any suitable commercial chassis
- Chassis used to date include:
  - MAN
  - Mercedes Benz
  - Isuzu
  - Iveco
  - Mitsubishi
  - DAF


### Tank unit

- 6mm thick hygiene quality stainless steel waste tank
- 4mm thick hygiene quality stainless steel rinse tank
- 600mm access manholes
- Foldable stainless steel baffles for ease of inspection and cleaning
- Clearly positioned easy to read contents gauges

### Optional equipment

- Cold weather cladding and tank heaters
- Hydraulically operated stainless steel lift platform utilising highly stable double scissor mechanism (max ht 3m)
- Disinfectant tank and automatic dispensing system
- Tank rinse system

TSU

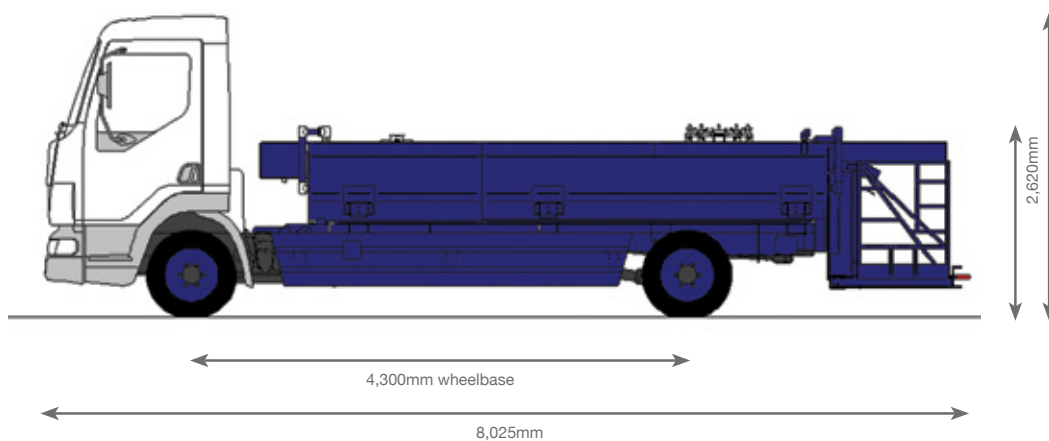

\*Sample unit – exact dimensions will be dependent on vehicle chassis.