

➤ Cargo & Freight Vehicles – ULD Carriers



On Standard Commercial Vehicle Chassis

Long term durability, the ideal solution for fast and safe cargo and freight movement over unlimited distances.

- Shot blasted and finish painted to customers individual livery requirements with full wax treatment.
- Fitted to any suitable standard commercial 18 tonne chassis cab.
- Stainless steel vertical vehicle exhaust system.
- Complies with Road Traffic Act, Motor Vehicle Construction and Use Regulations, IATA Airport Handling Equipment Specifications, Health and Safety and European CEN Standards.
- Duplicate control stations at rear.
- Locks and stops capable of safely restraining all loads.
- Impact resistant powered pick up drive rollers fitted to rear of platform.
- Alternative payload configuration available.
- Payload capacity: 13,600kg.
- 3 spot or 5 spot ULD powered load bed.
- Suitable for the safe handling and transport of all types of pallets and containers.
- Various box body options including ¾ length or fully enclosed 5 spot ULD.
- Optional refrigerated box body.
- Purpose designed for high utilisation, significantly reducing the portfolio of vehicles required for aircraft cargo and freight movement.
- Can be used around the airport, on the apron and public highways.
- 5 non-slip hydraulically powered rollers, sequentially controlled to each ULD position to load/off load pallets and containers.
- 5 lane roller track with air lift facility on rear ULD location.
- Self draining non-slip floor with no gaps, toe traps or trip hazards.



Passenger Stairs
Belt Loaders
Cargo & Freight Vehicles
Toilet & Water Trucks
Aircraft Loaders
Fuel Tank Repair Trolleys
Heater Trolley
Air Conditioning Trolley
Maintenance Docks & Stagings
Special Projects

Remember, each piece of equipment is maintained via our through-life support and training services – wherever you are in the world, 365 days of the year.

T +44 (0)1656 743700
E office@amss.co
W www.amss.co


“ Highly robust design and construction to provide guaranteed continuous operations in the harsh airside environment ”

➤ Cargo & Freight Vehicles – ULD Carriers

ULD carrier

- Payload: 13,600kg
- 5 x containers AKE, AKC, AKH
- 5 x APEs
- 2 x 96 x 125 pallets
- 2 x 88 x 125 pallets
- 1 x Winged Pallet 125" base + 29" wings
- 1 x AAV container
- 2 x LD-6 container
- 2 x LD-9 container
- Any combination of the above


5 spot open ULD carrier example

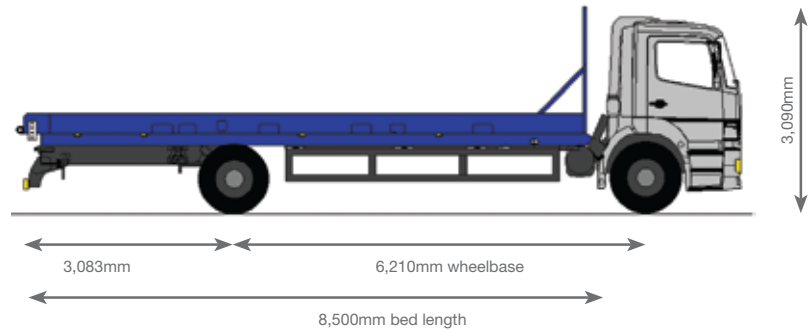

Combined freight vehicle

- Payload: 13,600kg
- 3 x CMPs
- 4 x containers AKE, AKC, AKH
- 4 x APEs
- 2 x 96" x 125" pallets
- 2 x 88" x 125" pallets
- 1 x AAV container
- Any combination of the above

¾ box body example

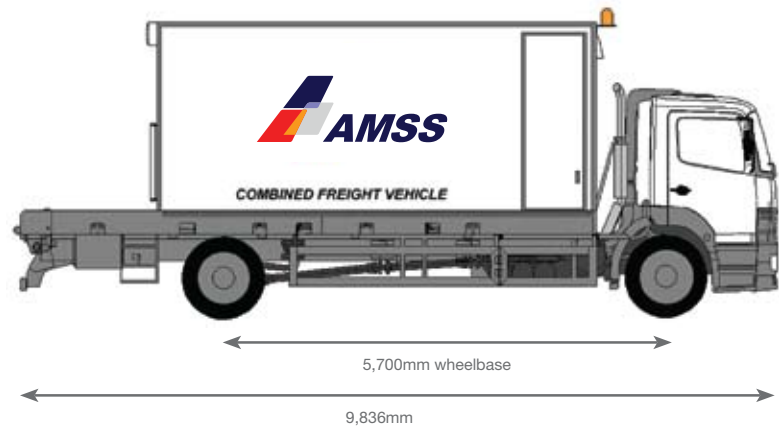

Standard features

- Suitable for use on any suitable 18 tonne GVW commercial chassis
- Full width rubber clad powered drive rollers
- Multiple locks and stops to restrain all loads